

Fiber Optic Patch Panels

AMP NETCONNECT provides together with the complete SOLARUM Fiber Optic Cabling System a full range of Fiber Optic Patch Panels for any installation. Whether for Fusion Splice, mechanical Splice or for Direct Termination applications - we have the solution.


All Panels are designed to ensure fast and easy installations but also a long-term reliable operation of the installed network. AMP has recognized that especially for Fiber Optic Cabling systems it is very important to route and keep the cable and fiber very exactly in an installation in order to guarantee the required minimum bend radius. All panels are designed to support these requirements.

1U (19") Fiber Optic Patch Panels Drawer Style

These Panels are available with ST or SC Duplex Adapters whether unloaded or loaded with 12 or 24 Ports.

Features:

- **300 mm depth**
- Colours: black or white
- Holder for 2 Splice Trays
- Supplied with Cable Glands and Fiber Management

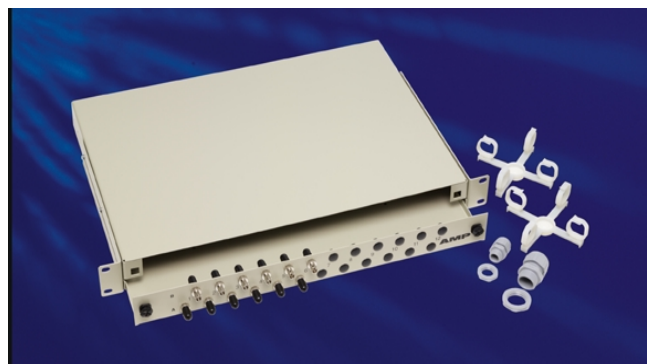

AMP Part Numbers:

AMP PN	Description
0-1206114-5	ST Panel, 24 Port, unloaded, white
0-1206114-8	ST Panel, 24 Port, unloaded, black
2-1206114-1	ST Panel, 12 Port, loaded, white
2-1206114-4	ST Panel, 12 Port, loaded, black
4-1206114-1	ST Panel, 24 Port, loaded, white
4-1206114-4	ST Panel, 24 Port, loaded, black
0-1206138-5	SC Panel, 24 Port, unloaded, white
0-1206138-8	SC Panel, 24 Port, unloaded, black
2-1206138-1	SC Panel, 12 Port, loaded, white
2-1206138-4	SC Panel, 12 Port, loaded, black
4-1206138-1	SC Panel, 24 Port, loaded, white
4-1206138-4	SC Panel, 24 Port, loaded, black

Accessories:	
Splice Trays:	
PN 559433-3	For 12 heatshrink Fusion Splices
PN 559433-4	for 12 CORELINK Splice
Cable Management:	
PN 1206144-1	Cable Gland PG-9
PN 1206145-1	Cable Gland PG-16
PN 1206146-1	Cable Management Rings (2pcs.)
Pigtails for Fusion Splice Applications:	
PN 349582-2	ST Pigtail, 62.5/125µ, 1m
PN 349569-2	ST Pigtail, 50/125µ, 1m
PN 349584-2	SC Pigtail, 62.5/125µ, 1m
PN 349568-2	SC Pigtail, 50/125µ, 1m

1U (19") Fiber Optic Patch Panels Drawer Style (Low Profile - 220 mm depth)

These Panels are especially designed for space effective applications. They are only 220 mm deep.

Features:

- Supplied with Cable Glands and Cable Management
- Includes Splice Holders (for heatshrink fusion splices)
- Colour: black

AMP Part Numbers:

AMP PN	Description
0-1206480-8	ST Panel, 24 Port, unloaded, black
4-1206480-4	ST Panel, 24 Port, loaded, black
0-1206483-8	SC Panel, 24 Port, unloaded, black
4-1206483-4	SC Panel, 24 Port, loaded, black

